

TROLLEYS

HORIZONTAL PROFILES

CARR CB

Trolley for profiles with five adjustable supports.

Length: 4263 - 5263mm.

Contact surface coated with anti scratch, shockproof material.



CARR 100 Q

Trolley for carriage and storage of profiles in horizontal positions.

Width: 912mm Length: 1767mm.

Contact surfaces coated with anti scratch and shock-proof PLASTIC material.



VERTICAL PROFILES

CARR 200 Q

Trolley for carriage and storage of profiles in vertical position.

Width: 912mm Length: 1282mm.

Contact surfaces coated with anti scratch and shock-proof PLASTIC material.



CARR 300 Q

Trolley for carriage and storage of profiles in vertical position.

Width: 912mm Length: 1718mm.

Contact surfaces coated with anti scratch and shock-proof PLASTIC material.



CARR 230 Q

Trolley for handling and storing profiles vertically.

Width: 912mm Length: 2000mm;
Height: 1024mm Length: 1718mm.

Contact surfaces coated with anti scratch and shock-proof PLASTIC material.



CARR 250 Q

Trolley for handling and storing profiles vertically.

Width: 1024mm Length: 1718mm;
Height: 1044mm Length: 2000mm.

Contact surfaces coated with anti scratch and shock-proof PLASTIC material.



FRAMES

CARR 400 Q

Trolley handling and storing sashes, frames or windows and doors.

Width: 912mm Length: 1718mm.

Contact surfaces coated with anti scratch and shock-proof PLASTIC material.



CARR 500 Q

Trolley for sashes handling.

Width: 900mm Length: 1738mm.

Contact surfaces coated with anti scratch and shock-proof PLASTIC material.



CARR 600 Q

Trolley for carriage and storage of sashes and frames.

Width: 912mm Length: 1282mm;
Width: 912mm Length: 1264mm.

Contact surfaces coated with anti scratch and shock-proof PLASTIC material.




CARR 900 Q

Trolley for handling and storing oversize sashes/frames.

Breite: 912mm Length: 2000mm;
Breite: 912mm Length: 1282mm;
Breite: 900mm Length: 1442mm.

Contact surfaces coated with anti scratch and shock-proof PLASTIC material.

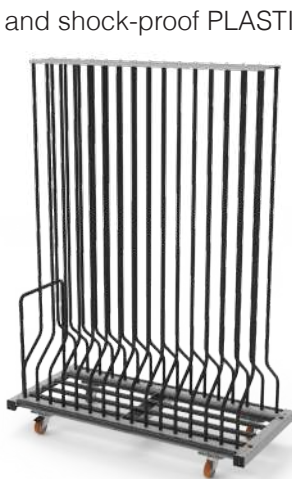

UP

Electric lifter to facilitate loading / unloading of bars by a single operator.

Work height adjustable from 290 to 1300 mm.


Working distance adjustable from 1200 to 1900 mm.

Maximum lifting capacity of the machine: 40 kg.



CHOOSE YOUR FORMAT

	Loading (kg)	No. Of Compartments	Compartment width (mm)
PROFILES			
CARR 100 Q	540	8	254
CARR CB	600	1	926
CARR 200 Q	560	8	113
CARR 300 Q	650	10	128
CARR 230 Q	560 / 850	22 / 30	118 / 100
CARR 250 Q	520 / 850	22 / 30	118 / 100
SASHES / FRAME			
CARR 400 Q	560	-	-
CARR 500 Q	550	11	109
CARR 600 Q	560	9 / 5	84 / 163
CARR 900 Q	520 / 520 / 850	5 / 9 / 15	210 / 91 / 93



The specifications and illustrations in this catalogue are only guideline, **Comall** therefore reserves the right to make any modifications it deems necessary for technical or commercial reasons at any time and without prior notification.

03/2025, versione 1.2



FomGroup

- FomIndustrie
- FomFrance
- FomChina
- FomIndia
- FomRomânia
- FomUSA
- FomTurkey
- FomEspaña
- FomDeutschland
- FomBrasil
- FomCono Sur
- FomCanada
- Comall
- FST
- profteQ
- RIM
- Tex Automation
- GrafSynergy
- Dubus



Comall
AluminiumMachinery

Via Salimbene da Parma, 4/C
42124 - Reggio Emilia (RE) - ITALIA

infocomall@comall.it

comall.it





Comall



TROLLEYS