



assembly and test benches

Guaranteed quality and operational efficiency.



Job 1000 Plus / Job 1000 S

Multifunction hardware assembly bench

Multi-function assembly bench for full assembly of hardware for PVC, wood-aluminium and aluminium window frames with perimeter hardware.

Max dimensions of the frame:

2500 mm x 2500 mm.

Job 1000 Plus

Horizontal milling unit.

Job 1000 S

Cutting frame direct dimension.

Table pneumatic tilting 0° - 14°.



Job 15 / Job 15/3000 / Job 15/2000 / Job 15 L

Assembly bench with adjustable bars on work table

Job 15

Max. work table dimension:

2874 mm x 1150 mm.

Job 15/3000

Max. work table dimensions:

3875 mm x 2015 mm.

Extensible back support, equipped with 2 longitudinal sliding bars.

Job 15/2000

Max. work table dimensions:

2874 mm x 2015 mm.

Extensible back support, equipped with 2 longitudinal sliding bars.

Job 15 L

Dimensioni massime del piano:

3875 mm x 1150 mm.



Job TB

Test bench for frames

Casing locking, made by couple of vertical bars, fitted on linear guides pneumatically operated.

Max dimensions of the frame:

2286 mm x 2300 mm.

Pneumatic rotation from 0° to 90°.




Tilt 2

Bench to tilt sashes and frames from horizontal to vertical line and vice versa

Max dimensions of the frame:

2300 mm x 3000 mm.

Roller table with plastic material coated rollers;
down-away pneumatic.

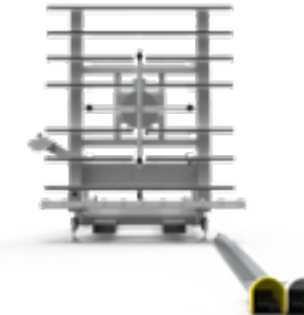

Job GLA

Glazing bench

Max dimensions of the frame:

1500 mm x 1500 mm.

Cross cylinder stroke: 100 mm.

Roller conveyor that can be manually excluded.

Operation of the tilting table by means of a pedal.

Cross cylinder activation via console.



Double-front roller conveyor 2000x250 / Double-front roller conveyor 360°

Roller conveyor for handling

Double-front roller conveyor 2000x250

Horizontal steel rollers: Ø 50 mm.

N° 8 crosspieces with vertical nylon rollers.

Double-front roller conveyor 360°

360° clockwise and counterclockwise rotation angle, with the spring plunger you can lock the position at: 0°, 90°, 180°, 270°, 360°.



Traslo 1
Roller table to drive sashes and frames with rollers to slide on rails
Roller table to drive sashes and frames with rollers to slide on rails.
Horizontal steel rollers: Ø 50 mm.




Job 07
Turning assembly bench
Max dimensions of the frame: 1620 mm x 2500 mm.



Handling bench
Handling bench for sashes and frames
Contact surface coated with non-scratch, shockproof material.
Prearranged for pneumatic system.
Height adjustment.
Work table dimensions: 3000 mm x 1300 mm
Work table dimensions: 1615 mm x 1300 mm
Loading: 120 Kg.

The specifications and illustrations in this catalogue are only guideline, Comall therefore reserves the right to make any modifications it deems necessary for technical or commercial reasons at any time and without prior notification.

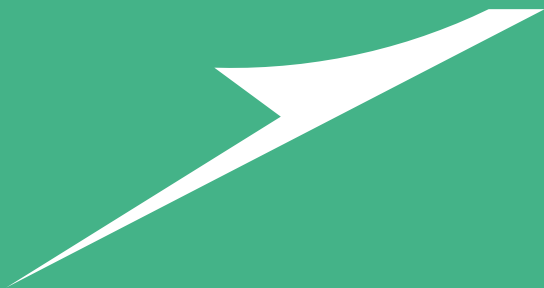

 **Comall**

Fom — One Group. Every Solution.

www.comall.it

**assembly and
test benches**
product range